
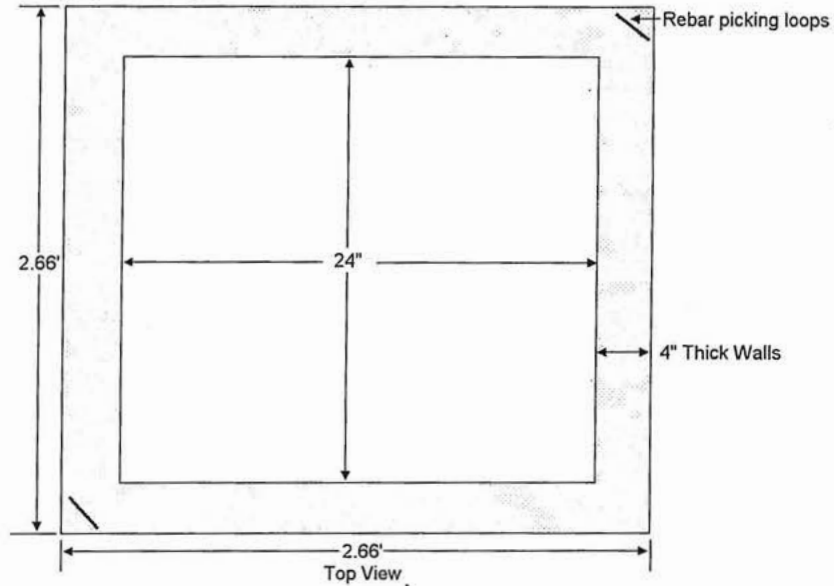


Donaldson Bros. Ready Mix - Hamilton, Montana

2'x2'x2' Sump Box

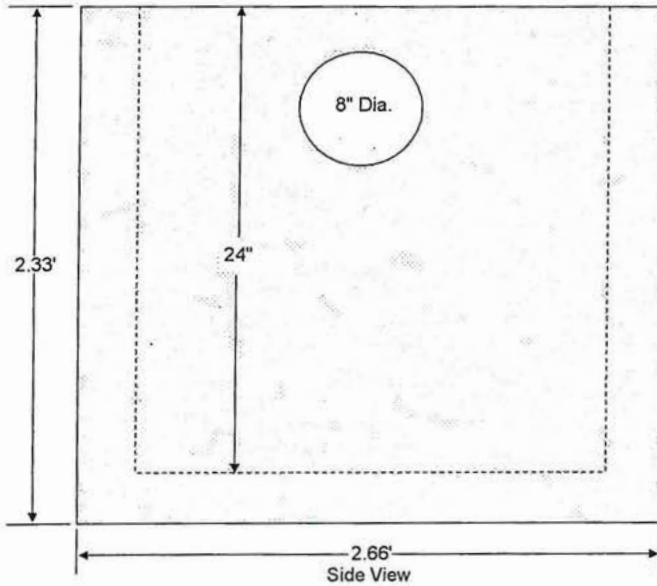

DBRM Precast 4500PSI Structural Concrete

Batch Weights 1 cu. Yard

| | | | |
|------------------|-----------|-------------------|-------|
| Lafarge Type III | 513 lbs | Entrained Air (%) | 5 |
| NewCem (Slag) | 94 lbs | Slump (inches) | 4 |
| 3/4" Rock | 1575 lbs | W/C ratio | 0.492 |
| 1/4" Fines | 300 lbs | | |
| Con Sand | 1000 lbs | | |
| Water | 298.8 lbs | | |
| MBAE 90 | 0.38 lbs | | |
| Polyheed 997 | 2.28 lbs | | |
| UltraFiber 500 | 1 lbs | 1lbs per yard | |

Reinforcement: 6" x 6" x 10 gauge wire mesh

Weight: 1,270lbs

Last Update: May 29th, 2013

Not to Scale

